


# NSGV SERIES "CYCLONE" DUST COLLECTOR

## I, O & M MANUAL

### ERECTION PROCEDURES

With the Cyclone in place, and after the After Filter upper modules have been assembled on the floor, assemble the Noise Attenuator with respective transitions. This can be done on the floor and hoisted into position or you may assemble the transitions in steps off of the blower, temporarily supporting each piece that is added. After completing this assembly procedure, hoist and temporarily support the After Filter module assembly previously assembled. The After Filter assembly may now be bolted to the Noise Attenuator assembly. The assembly should look as shown below.

**NOTE: CAULK ALL FLANGES BEFORE BOLTING TOGETHER IN EACH STEP.**

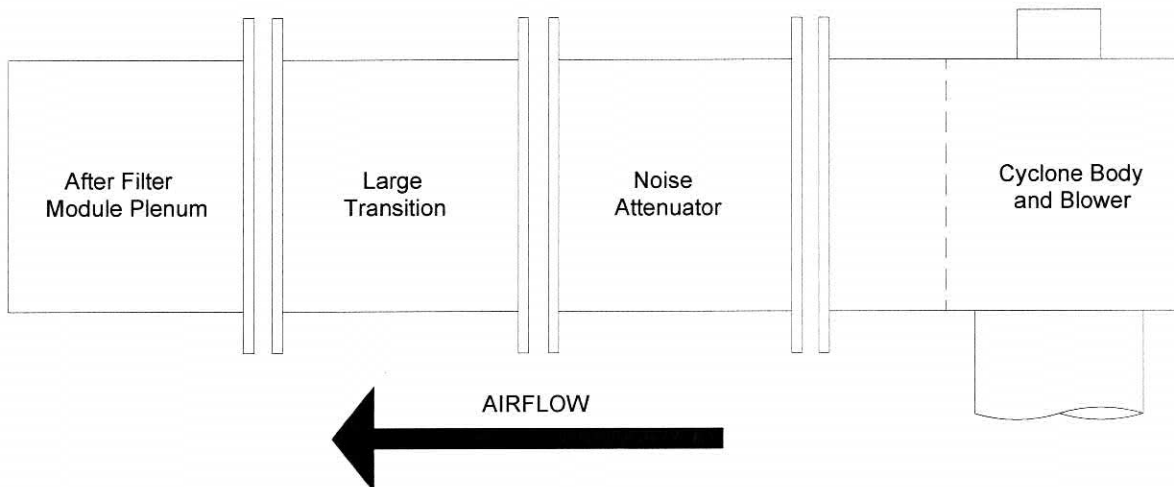

**National System of Garage Ventilation**  
**714 N. Church St. / P.O. Box 1186**  
**Decatur, IL 62525**  
**(217)423-7314 / (800)728-8368 / (fax)(217)422-5387**  
**NSGV.com** **JMDILLIGAF@aol.com**